

FTR-7000

Flexible Flask Transfer

Efficient Increased Production

Technical Specification

Model
FTR-7000

Overall weight
Approx. 100kg



Operating speed range
400bpm

Finger spacing options
24 fingers at 4 1/2" spacing
18 fingers at 6" spacing
16 fingers at 6 3/4" spacing
12 fingers at 9" spacing

Container size limits
68mm at 4 1/2" spacing
95mm at 6" spacing
110mm at 6 3/4" spacing
140mm at 9" spacing

Drive requirements
Standard Sheppee transfer drive or equivalent

Service requirements
Connection to centralised Lincoln lubrication system

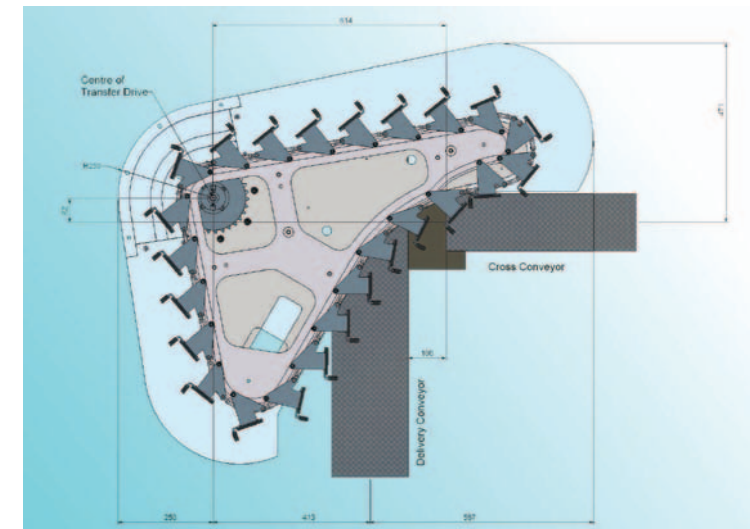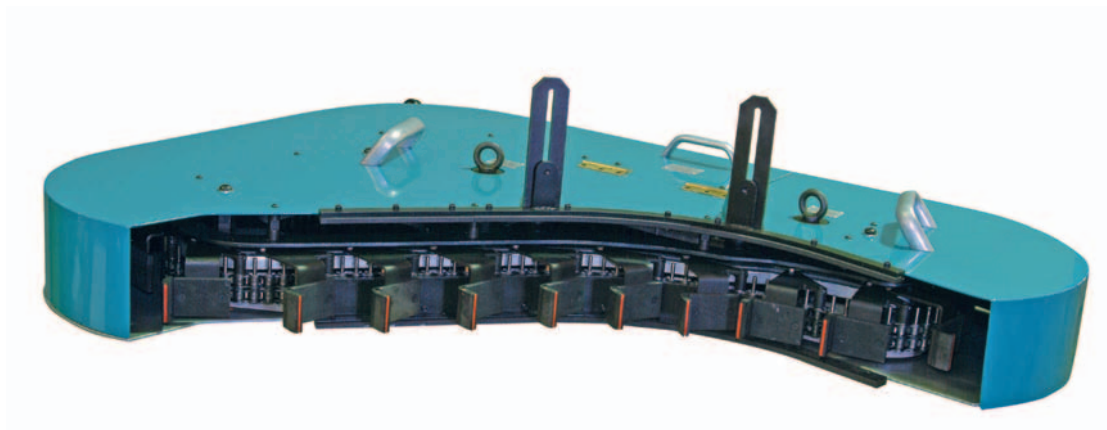

Features and Benefits

- Presents containers at 45 degrees, therefore increasing stability by approximately 350%
- Four finger spacing configurations
- Transfers containers from 20mm diameter to 140mm diameter
- Adjustable top and bottom ware guides
- Potential 100% payback within one week
- Enhanced container stability at all speeds
- Increased production efficiencies due to dedicated and unique transfer design
- Minimal spares holding required
- Provides space between rows at the cold end, providing optimum spray protection